

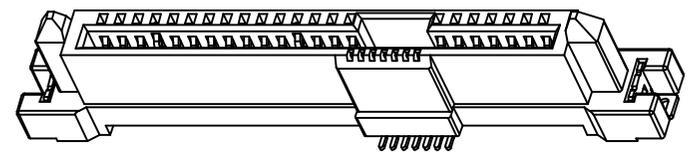
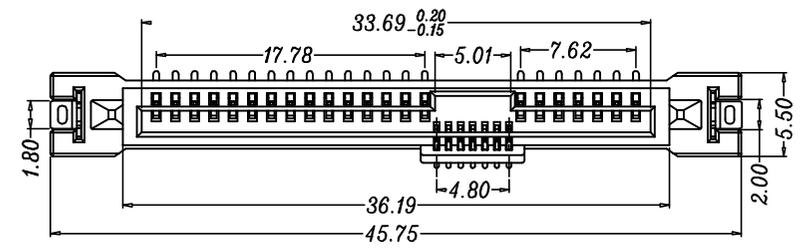


版次 REV.	变更号码 ECN.NO.	修改内容 MODIFY.CONTENT	修改日期 DATE
00		初版发行	09/17'14



NOTES:

- MATERIAL:SEE NOTES 1
HOUSING : High Temperature Thermoplastic ,
UL94V-0, COLOR : BLACK
TERMINAL(max): Copper Alloy,THICKNESS = 0.30 mm
TERMINAL(min): Copper Alloy,THICKNESS = 0.25 mm
FORKLOCK: Copper Alloy,THICKNESS = 0.30 mm

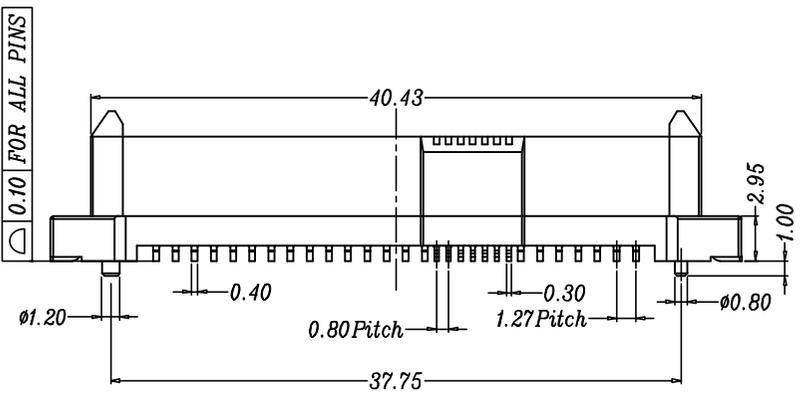

2.FINISH:


- CONTACT: GOLD PLATING ON CONTACT AREA,MATTE TIN PLATING ON SOLDER TAIL AREA,NICKEL UNDER PLATING.
- SHELL: SOLDERABILITY NICKEL PLATING OVER ALL.

3. PART NUMBER DESCRIPTION :


AP06XX XXX X C X X

(1).XX:

- 41:GOLD FLASH ON CONTACT AREA/100μ" Min MATTE TIN ON SOLDER AREA.
- 46:30μ" MIN. Au ON CONTACT AREA/100μ" Min MATTE TIN ON SOLDER AREA.
- 21:GOLD FLASH ON CONTACT AREA/100μ" Min BRIGHT-TIN ON SOLDER AREA.
- 25:15μ" MIN. Au ON CONTACT AREA/100μ" Min BRIGHT-TIN ON SOLDER AREA.
- 27:30μ" MIN. Au ON CONTACT AREA/100μ" Min BRIGHT-TIN ON SOLDER AREA.

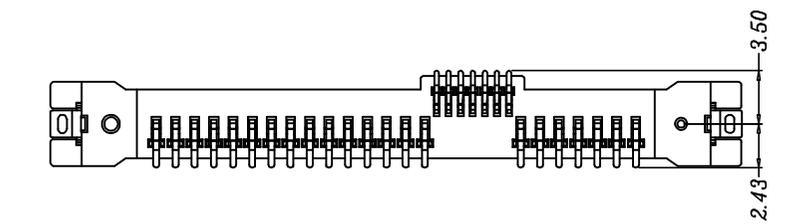

- "R": RoHS; B:"B":HALOGEN FREE
- "C": BLUE(300C),"K": BLACK
- X:"B"-RELL ; "C"-TRAY
- X:"0": WITHOUT LOGO; "1": WITH LOGO;
- .XXX: 001: WITHOUT CAP; 002: WITH CAP;

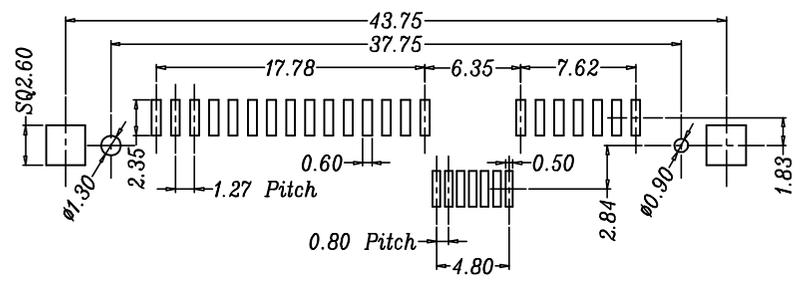

RECOMMENDED P.C.B LAYOUT

T=±0.05

GENERAL TOLERANCE		图号 FILE.NO.	C1U111116-02	绘图 DRAWN	Zhang	比例 SCALE	
X.±0.25	x.°±5°	品名 TITLE	SAS 29P 180° SMT ASSY 6G	审核 CHECKED		单位 UNITS	mm
.X±0.20	.x°±2°	料号 PART.NO.	SEE NOTE	核准 APPROVED			
.XX±0.15	.xx°±1°	版次 REV.		日期 DATE	9/17'14		
.XXX±0.05	.xxx°±0.5°	数量 Q'TY	01				
页次 SHEET	1/1						

