


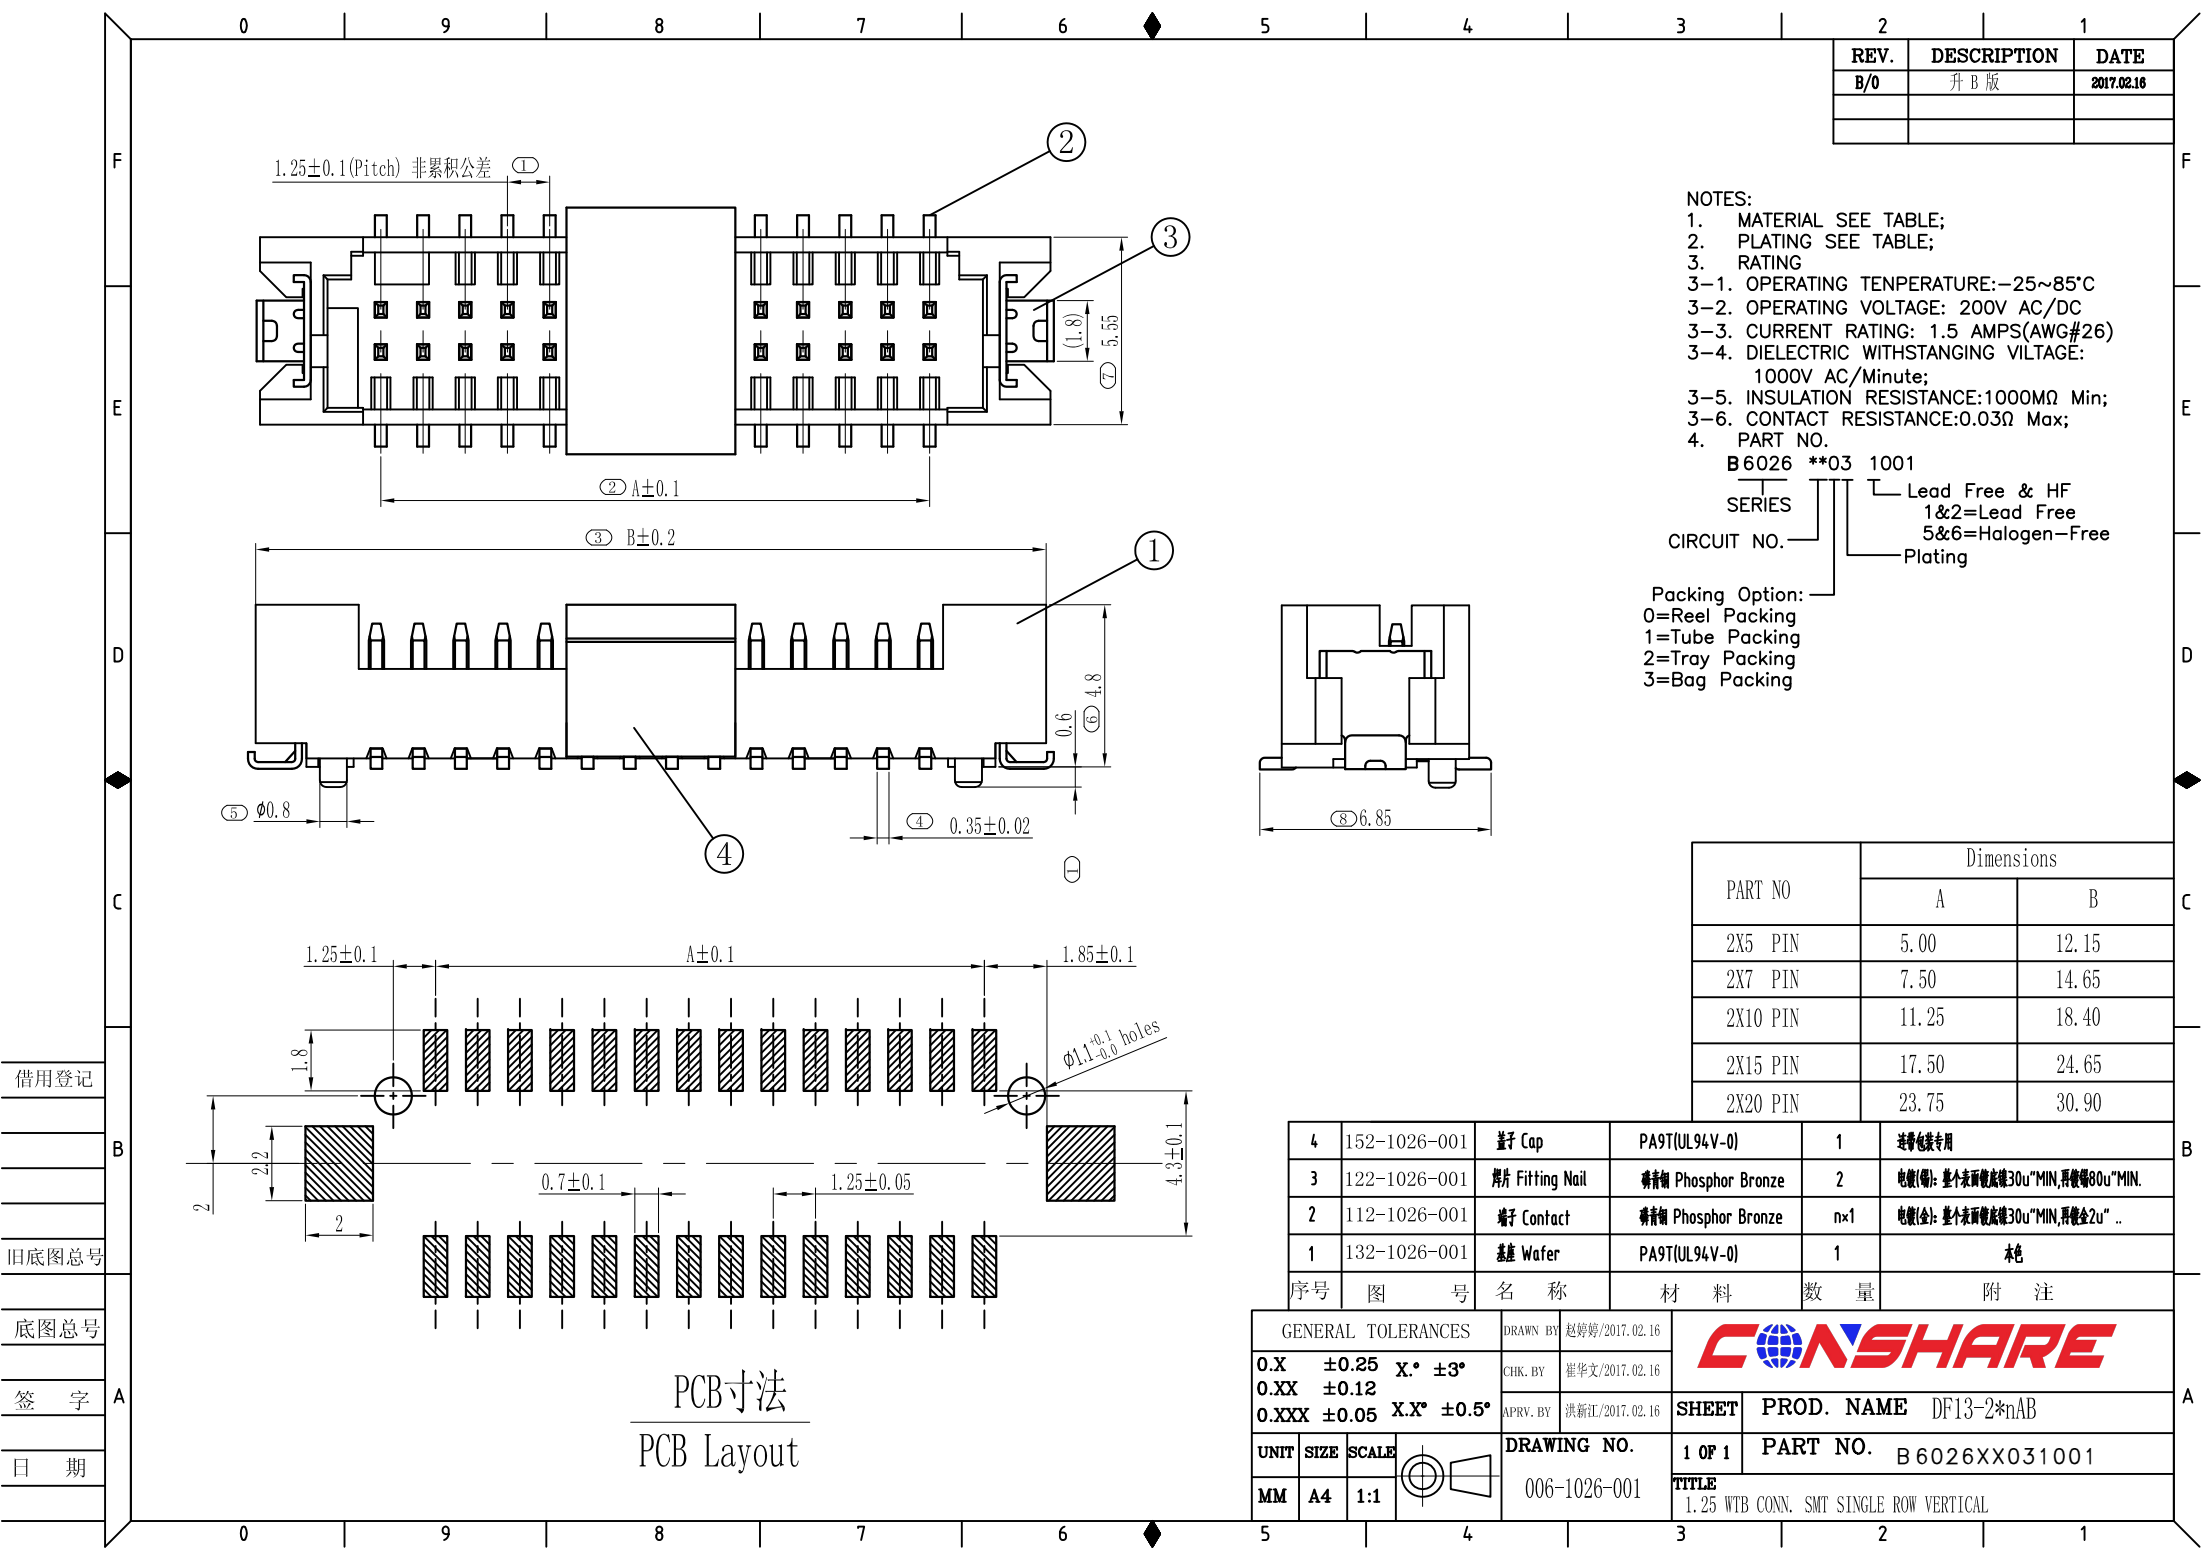

REV.	DESCRIPTION	DATE
B/0	升 B 版	2017.02.16

NOTES:
1. MATERIAL SEE TABLE;
2. PLATING SEE TABLE;
3. RATING
3-1. OPERATING TEMPERATURE:-25~85°C
3-2. OPERATING VOLTAGE: 200V AC/DC
3-3. CURRENT RATING: 1.5 AMPS(AWG#26)
3-4. DIELECTRIC WITHSTANDING VOLTAGE:
1000V AC/Minute;
3-5. INSULATION RESISTANCE:1000MΩ Min;
3-6. CONTACT RESISTANCE:0.03Ω Max;
4. PART NO.
B 6026 **03 1001
SERIES
CIRCUIT NO.
Packing Option:
0=Reel Packing
1=Tube Packing
2=Tray Packing
3=Bag Packing
Lead Free & HF
1&2=Lead Free
5&6=Halogen-Free
Plating

PART NO	Dimensions	
	A	B
2X5 PIN	5.00	12.15
2X7 PIN	7.50	14.65
2X10 PIN	11.25	18.40
2X15 PIN	17.50	24.65
2X20 PIN	23.75	30.90

4	152-1026-001	蓋子 Cap	PA9T(UL94V-0)	1	透帶包裝專用
3	122-1026-001	焊片 Fitting Nail	磷青銅 Phosphor Bronze	2	電鍍(鍍): 整個表面鍍底鍍30u"MIN,再鍍80u"MIN.
2	112-1026-001	端子 Contact	磷青銅 Phosphor Bronze	n×1	電鍍(鍍): 整個表面鍍底鍍30u"MIN,再鍍80u" ..
1	132-1026-001	基座 Wafer	PA9T(UL94V-0)	1	本色
序号	图 号	名 称	材 料	数 量	附 注

GENERAL TOLERANCES			DRAWN BY	赵婷婷/2017.02.16			
0.X	±0.25	X.° ±3°	CHK. BY	崔华文/2017.02.16			
0.XX	±0.12						
0.XXX	±0.05	X.X° ±0.5°	APRV. BY	洪新江/2017.02.16		SHEET	PROD. NAME DF13-2*nAB
UNIT	SIZE	SCALE	DRAWING NO. 006-1026-001			1 OF 1	PART NO. B 6026XX031001
MM	A4	1:1					
			TITLE 1.25 WTB CONN. SMT SINGLE ROW VERTICAL				

借用登记

旧底图总号

底图总号

签 字

日 期




PCB寸法

PCB Layout


REV.	DESCRIPTION	DATE
B/0	升 B 版	2017.04.28

Note:

- 1.Sprocket holes pitch cumulative tolerance ± 0.1 . (Accumulative Pitch ± 0.2)
- 2.Carrier camber is within 1mm in 100mm.
- 3.Number of connectors:1000Pcs/REEL
- 4.All dimensions meet EIA-481-D requirements.
- 5.Thick ness: 0.4 ± 0.1 mm.
- 6.Material of top fape:PET, PE, PEF
- 7.Material of carrier fape:Poystyrene
- 8.For tape width (dimension A) 16mm and 24mm a pilot hole is provided on one side. For tape width (dimension A) 32mm and 44mm pilot holes are provided on both sides.

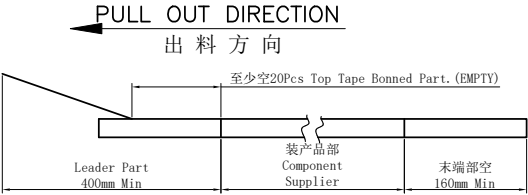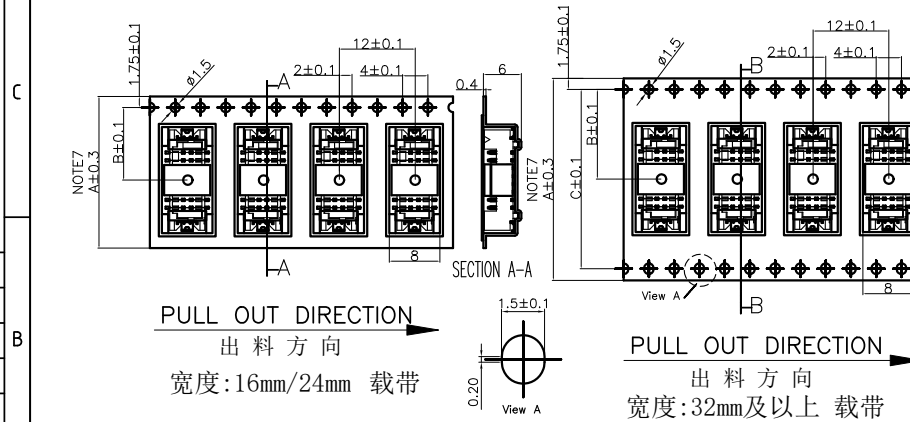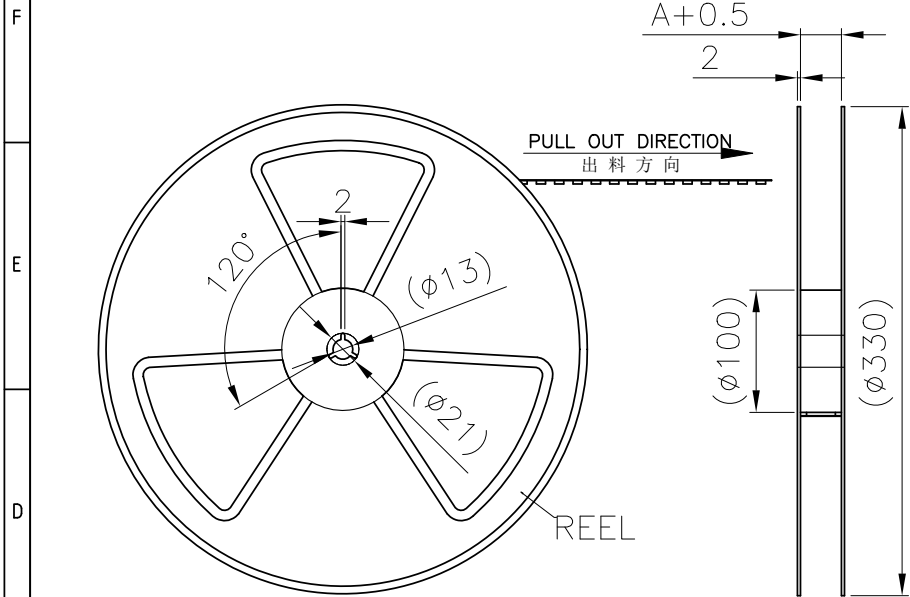


载带带头及带尾尺寸
Lead tape length

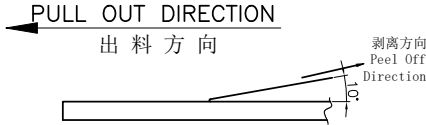

载带上下带剥离强度: 0.2N--1.3N(10g-130g)
Peeling off force of top tape:
0.2N--1.3N(10g-130g)

ROHS管理规定:

- 1、禁止使用含有ROHS指令所限制的物质。
- 2、对应的SGS或ITS出具的ICP-AES数据、不可测定物质的成分表,有效期一年。

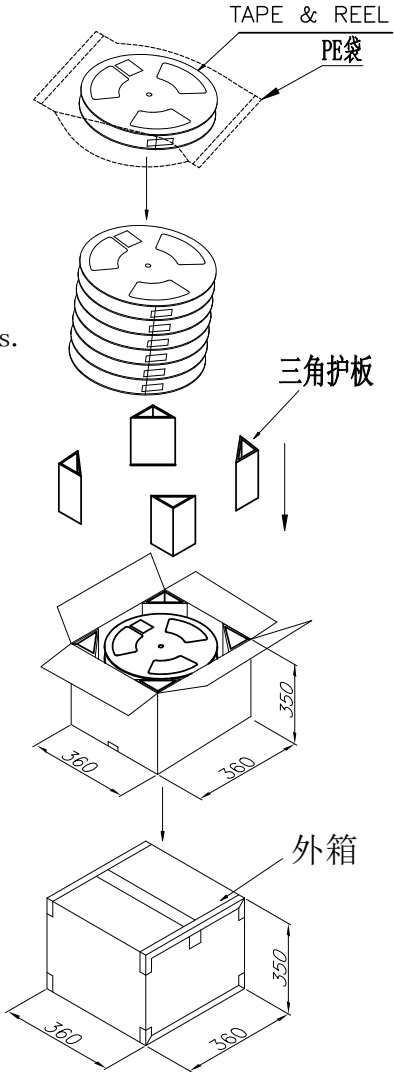

借用登记
旧底图总号
底图总号
签 字
日 期

A	芯 数 Pin (n)	PART NO.	尺 寸 Size		
			A	B	C
			24.0	11.5	—
	10-14	B602610031001---B602614031001	24.0	11.5	—
	20	B602620031001	32.0	14.2	28.4
	30-40	B602630031001---B602640031001	44.0	20.2	40.4

PART No.	B6026XX031001		
REEL WIDTH	24	32	44
PCS/REEL	1000		
REEL/BOX	12	9	7
BOX/PCS	18K	9K	7K
CTN. SIZE	360*360*350		

GENERAL TOLERANCES		
0.X	± 0.25	$X^{\circ} \pm 3^{\circ}$
0.XX	± 0.12	
0.XXX	± 0.05	$X^{\circ} \pm 0.5^{\circ}$
UNIT	MM	SCALE
A4	1:1	

DRAWN BY	
CHK. BY	
APRV. BY	
DRAWING NO.	004-1026-001

SHEET 1 OF 1		PROD. NAME DF13-nAB
PART NO. B 6026XX031001		
TITLE 1.25 WTB CONN. SMT SINGLE ROW VERTICAL		

