

AQ 6D 01 G X 15 01 X






Environmental Code

R:ROHS
W:HALOGE FREE
S:Sony

Gold Plating

B:30u"
C:15u"
D:5u"
F:3u"
G:2u"
H:1u"
J:all tin plated

Housing Colour

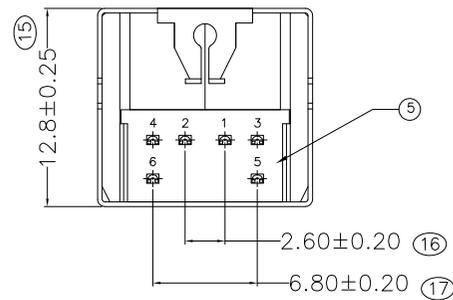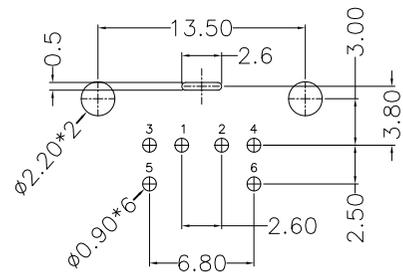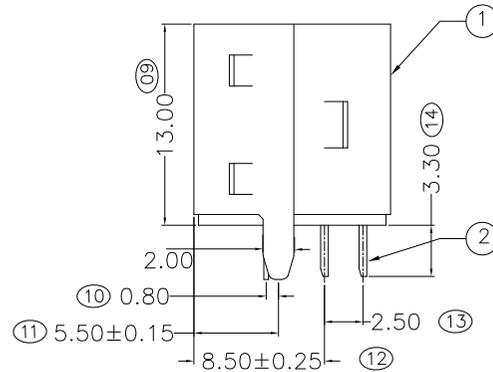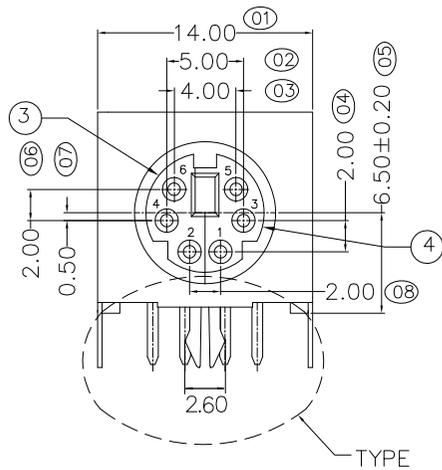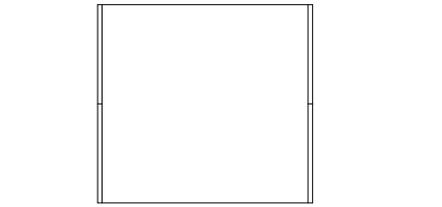

NOTES:



OPERATION TEMPERATURE: -40°C TO +80°C.

RECOMMENDED PROCESS CONDITION: TEMPERATURE: 260°C, 10~20S.


NO.	NAME	MATERIAL	PLATING	COLOR
5	COVER	HIGH TEMPERATURE THERMOPLASTIC		BLACK
			TEMPERATURE THERMOPLASTIC	BLACK
4	MID-RIGHT	TEMPERATURE THERMOPLASTIC		GREEN
3	MID-LEFT	TEMPERATURE THERMOPLASTIC		PURPLE
2	CONTACT	COPPE RALLOY T=0.20	AuXu"PLATING ON CONTACT AREA. 100u"MIN. Sn PLATING ON SOLDER TAIL AREA. 50u"MIN. NICKEL UNDERPLATING OVERALL.	
1	SHELL	SPCC T=0.30	BRIGHT Sn 80u"Min OVER Ni 50u"Min	
	NAME	MATERIAL	PLATING	COLOR

X. ± 0.50	X° ± 5°	DRAWN	NAME(INTENDED USE)		SHEET
.X ± 0.35	.X° ± 3°	DESIGN	CUSTOMER		
.XX ± 0.30	.XX° ±	CHECKED	PART NO.(INTENDED USE)	TITLE	
.XXX ± 0.20	.XXX° ±	APPROVED	AQ6D01GH1501R	单层MID(双色)成品工程图	1/2
	UNITS SCALE				
	MM 1:1				


版本	變更內容	日期
A	圖面新版發行	2013.09.2




真空盒下盖
100PCS/
盘




真空盒上盖



100PCS/
盒




10盒/排




PE 防水袋

干燥剂

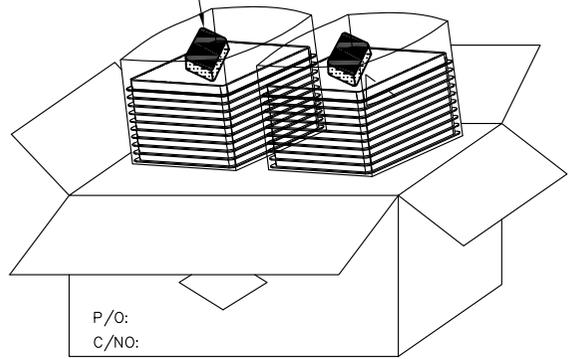

P/O:
C/NO:

2000PCS/箱

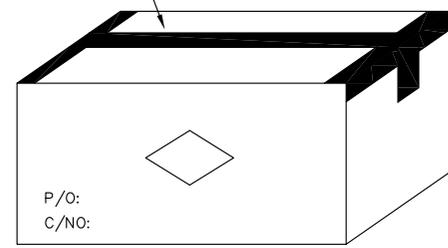

P/O:
C/NO:

料 号	品 名	用量(PCS)
Z02-0XX	紙箱	1
Z05-002	PE 防水袋	2
Z12-001	干燥剂	4
Z04-0XX	真空盒上盖	20
Z04-0XX	真空盒下盖	20
AQ6D01GH1501R	单层MID 无弹成品	2000

备注:

1. 真空盒: L=224, W=244, H=15.2
2. 纸 箱: L=460, W=250, H=18
3. 净 重: 7.6 Kg
4. 毛 重: 9.1 Kg
5. 外壳 (铁材) 专用

X. ±	X° ±	繪圖	模具編號	
.X ±	.X° ±			
.XX ±	.XX° ±	審核	料 號	品 名
.XXX ±	.XXX° ±	核准		
	單位 比例 MM 1:1		頁數	1/1