

客户图

NOTES:

1.FINISH:

1.1 HOUSING: LP-LCP BLACK 94V-0

1.2 CONTACT: H-HIGH CONDUCTIVE BRASS, GOLD (SEE P/N) PLATED IN CONTACT AREA, GOLD FLASH PLATED IN SOLDER AREA, 50u"MIN NICKEL UNDERPLATED OVERALL.

2. ELECTRICAL:

2.1 CURRENT RATING: 6.5A AC. DC

2.2 DIELECTRIC WITHSTANDING VOLTAGE: 1500V,AC/Minute

2.3 CONTACT RESISTANCE: 20mΩ MAX.

2.4 INSULATION RESISTANCE: 1000 mΩ Min

2.5 Operation Temperature: -40°C to +105°C

3.SALT SPRAY TEST:

3.1 CONCENTRATION IS 5%, THE TEMPERATURE IS 35±2°C, TEST TIME 8H MIN, NO OXIDATION OR RUST

4.Max Processing Temp: 265°C Seconds 40S

5.ORDER INFORMATION:



AA 250 S XXX S 1 E X

Pin数 004=2*02PIN 024=2*12PIN


端子电镀: S =Tin

塑胶高度: 1 =10.50mm












A=A KEY B=B KEY

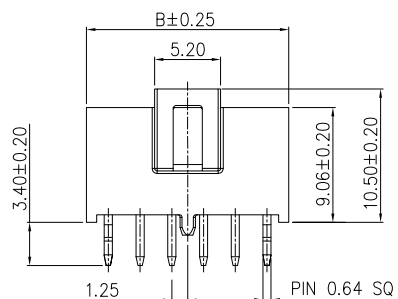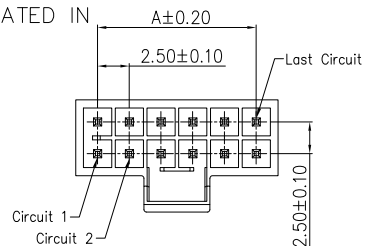


Even Positions
2x2P.2x4P.2x6P.2x8P





Odd Positions
2x3P.2x5P.2x7P

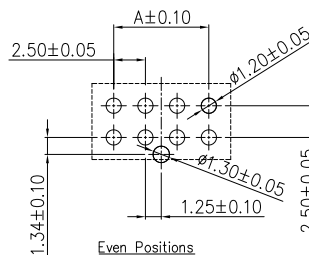

Even Positions
2x2P.2x4P.2x6P.2x8P
P.C.B LAYOUT

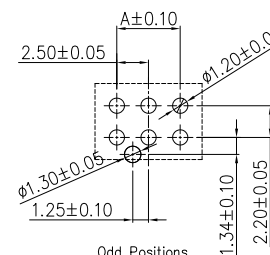

Odd Positions
2x3P.2x5P.2x7P
P.C.B LAYOUT



Circuits	Dimensions(mm)	
	A	B
2*2P	2.50	5.94
2*3P	5.00	8.44
2*4P	7.50	10.94
2*5P	10.00	13.44
2*6P	12.50	15.94
2*7P	15.00	18.44
2*8P	17.50	20.94
2*12P	27.50	30.94

						OPERATION	DRAW	WLY	2020.10.23				
						X.X ±0.45	DESIGN	Jensen	2020.10.23				
						X.XX ±0.25	CHECK	Jack	2020.10.23	SIZE	A4	PART NO.	AA250SXXXS1EX
						X.XXX ±0.15	APPROVE	Andy	2020.10.23	SHEET	1/1	TITLE:	2.50mm Crimp Style Connectors
AO			NEW			Angle ±3°				PROJ.	1:1	DRAW NO.	1600
REV	DATE	MODIFICATION DESCRIPTION			CHANGE	APPROVE	DIM.	TOL	UNIT	mm	SCALE	1:1	