

客户图

NOTES:

1. FINISH:

- HOUSING: LCP BLACK,UL94V-0.
- CONTACT: COPPER ALLOY, GOLD (SEE P/N) PLATED IN CONTACT AREA, 50u" MIN. NICKEL UNDERPLATED OVERALL.
- GROUND: BRASS,80u" MIN. MATTE TIN PLATED OVER 50u" MIN. NICKEL UNDERPLATED OVERALL.

2. ELECTRICAL:

- CURRENT RATING: 0.5A;
- VOLTAGE RATING: 50V AC/DC
- DIELECTRIC WITHSTANDING VOLTAGE: 200V AC/MINUTE.
- CONTACT RESISTANCE: 80mΩ MAX.
- INSULATION RESISTANCE: 500MΩ MIN.
- OPERATION TEMPERATURE:-40°C TO +105°C.

3.ORDER INFORMATION:

AA3 F XXX XX XXX R

Pin数码
SEE TABLE

端子电镀:

S0=Gold Flash/Tin(半金锡)
S1=1u" Gold/Tin
S2=3u" Gold/Tin
S3=5u" Gold/Tin
S4=10u" Gold/Tin
S5=15u" Gold/Tin
S6=30u" Gold/Tin

塑胶高度:

050=5.0mm("E")
060=6.0mm("E")
100=10.0mm("E")








包装方式:

R=TAPE REEL

TABLE1:

No. OF PIN	A	B	C	D
010:2x5PIN	11.30	5.09	3.20	8.20
020:2x10PIN	15.30	9.09	7.20	12.20
030:2x15PIN	19.30	13.09	11.20	16.20
040:2x20PIN	23.30	17.09	15.20	20.20
050:2x25PIN	27.30	21.09	19.20	24.20
060:2x30PIN	31.30	25.09	23.20	28.20
080:2x40PIN	39.30	33.09	31.20	36.20
100:2x50PIN	47.30	41.09	39.20	44.20
140:2x70PIN	63.30	57.09	55.20	60.20

MATING HEIGHT	E	H1	H2	H3
5.00mm	5.00	2.45	2.55	5.00
10.00mm			7.55	10.00
15.00mm			12.55	15.00
6.00mm	6.00	3.45	2.55	6.00
11.00mm			7.55	11.00
16.00mm			12.55	16.00
10.00mm	10.00	7.45	2.55	10.00
15.00mm			7.55	15.00
20.00mm			12.55	20.00

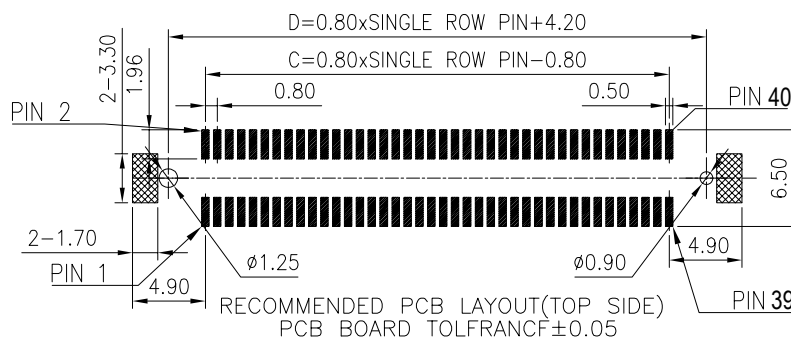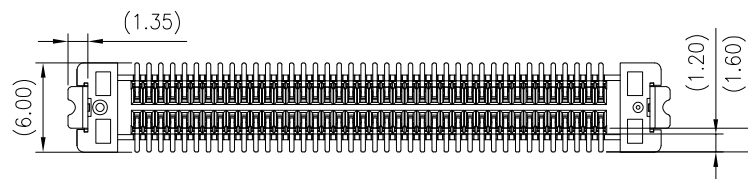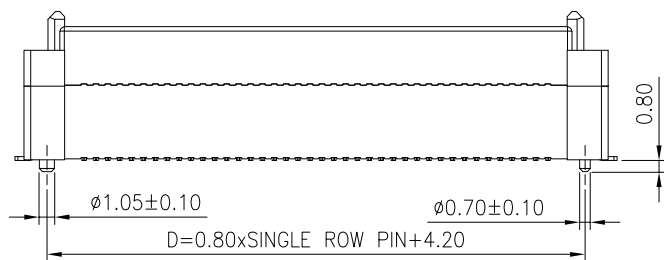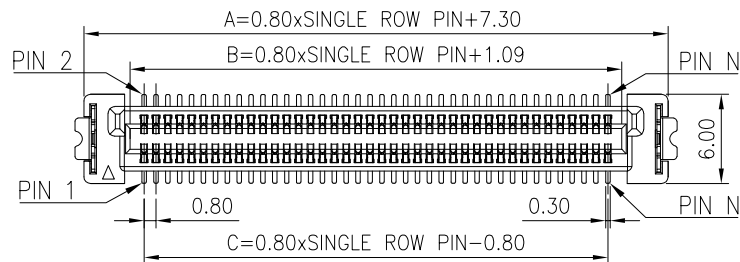

GENERAL TOLERANCES UNLESS SPECIFIED		PART NO.	TITLE
X± 0.35	X°± 3°	AA3FXXXXXXXXXX	
XX± 0.25	X°± 2°	APPROVED BY	BTB PITCH 0.8mm 母座直立式SMT TYPE
XXX± 0.15	XX°± 1°	JACK	
CUSTOMER DRAWING		CHECKED BY	DWG NO.
		MIKE	
SIZE	UNITS	DRAWN BY	SHEET SCALE REV
A4	MM[INCH]	CC	