

客户图

NOTES:

1. FINISH:

- 1.1 HOUSING: LCP BLACK,UL94V-0.
- 1.2 CONTACT: COPPER ALLOY,GOLD (SEE P/N) PLATED IN CONTACT AREA, 80u" MIN MATTE TIN PLATED IN SOLDER AREA,50u" MIN. NICKEL UNDERPLATED OVER

2. ELECTRICAL:

- 2.1 CURRENT RATING: 2 A PER PIN(2 PINS POWERED) RALL.
- 2.2 VOLTAGE RATING: 225V AC/318V DC.
- 2.3 OPERATION TEMPERATURE:-55°C TO +125°C.

3.BURR ALLOWANCE: 0.038 Max.

4.MINIMUM PUSHOUT FORCE: 2.22N.

5.-TR PACKAGING NOT AVAILABLE ON THE 100POSITION.

-TY PACKAGING ONLY AVAILABLE ON-100 POSITION.

6.ORDER INFORMATION:

AA4 F XXX XX XXX R

Pin数码

010=2*5PIN

~
200=2*100PIN

端子电镀:

S0=Gold Flash/Tin

S1=1u" Gold/Tin

S2=3u" Gold/Tin

S3=5u" Gold/Tin

S4=10u" Gold/Tin

S6=30u" Gold/Tin

塑胶高度:

053=5.30mm("E")

072=7.20mm("E")

103=10.30mm("E")

包装方式:

R=载带包装










TABLE1:

No. OF PIN	A	B	C	D
010=2x5PIN	8.32	10.00	6.80	3.20
020=2x10PIN	12.32	14.00	10.80	7.20
030=2x15PIN	16.32	18.00	14.80	11.20
040=2x20PIN	20.32	22.00	18.80	15.20
050=2x25PIN	24.32	26.00	22.80	19.20
060=2x30PIN	28.32	30.00	26.80	23.20
080=2x40PIN	36.32	38.00	34.80	31.20
100=2x50PIN	44.32	46.00	42.80	39.20
120=2x60PIN	52.32	54.00	50.80	47.20
150=2x75PIN	64.32	66.00	62.80	59.20
160=2x80PIN	68.32	70.00	66.80	63.20
200=2x100PIN	84.32	86.00	82.80	79.20

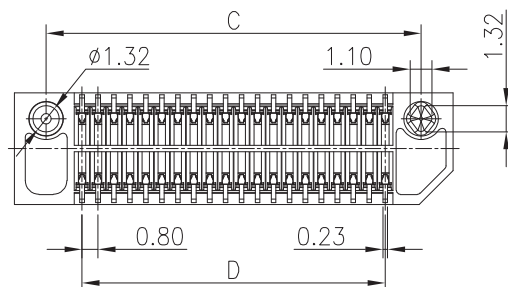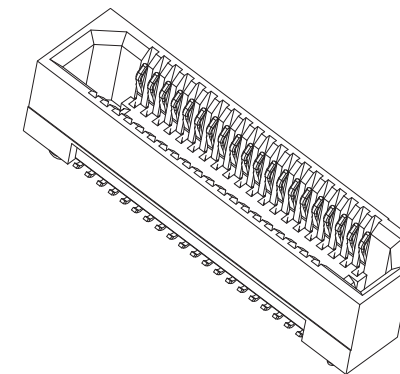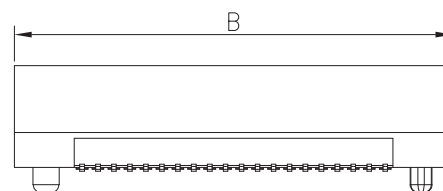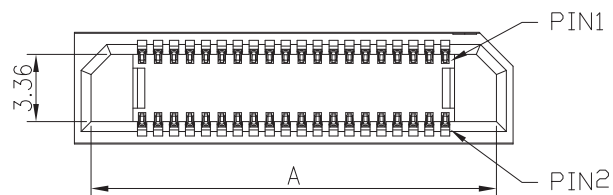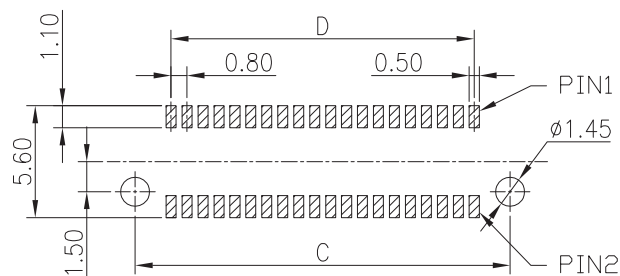

RECOMMENDED PCB LAYOUT(TOP SIDE)
PCB BOARD TOLFRANCF±0.05

GENERAL TOLERANCES UNLESS SPECIFIED		PART NO. AA4FXXXXXXXXR				
X± 0.40	X°± 3°	APPROVED BY JACK				
XX± 0.25	X°± 2°	CHECKED BY MIKE	TITLE 0.80mm BTB 母座直立式 SMT			
XXX±0.15	XX°± 1°	DRAWN BY CC	DWG NO.			
SIZE A4	UNITS MM[INCH]			SHEET 1:1	SCALE 1:1	REV 4