
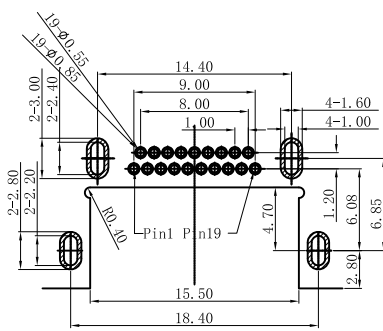
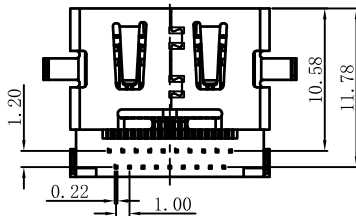

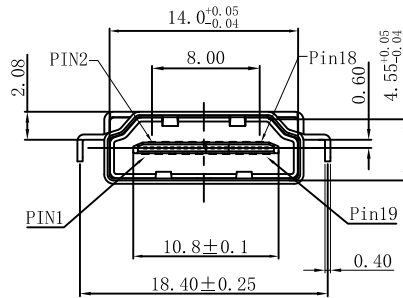



HDMI CONNECTOR FEMALE



RECOMMENDED PCB LAYOUT (TOP VIEW)
TOLERANCE: ±0.05mm

REV.	ECN NO.	DESCRIPTION	DATE	DESIGN
A0		NEW	2019.7.28	PACK
A1		增加端子隔栏槽	2020.5.25	PACK
A2		料号变更	2021.3.5	PACK

SPECIFICATIONS:

1. ELECTRICAL CHARACTERISTICS

- 1-1. CURRENT RATING: 0.5 AMP
- 1-2. VOLTAGE RATING: 40 V
- 1-3. CONTACT RESISTANCE: 30MILLIOHMS MAX
- 1-4. INSULATION RESISTANCE: 100M MIN. @500V DC
- 1-5. DIELECTRIC WITHSTANDING VOLTAGE: 500V AC FOR 1 MINUTE

2. MECHANICAL CHARACTERISTICS:


- 2-1. INSERTION FORCE : 4.5KGF MAX.
- 2-2. WITHDRAWING FORCE : 1KGF ~ 4KGF.

3. LIFE TEST: 10000 CYCLES

4. OPERATING TEMPERATURE: -25° C TO +85° C

5. PART NO. DESCRIPTION:




HDMI 反向沉板成品料号

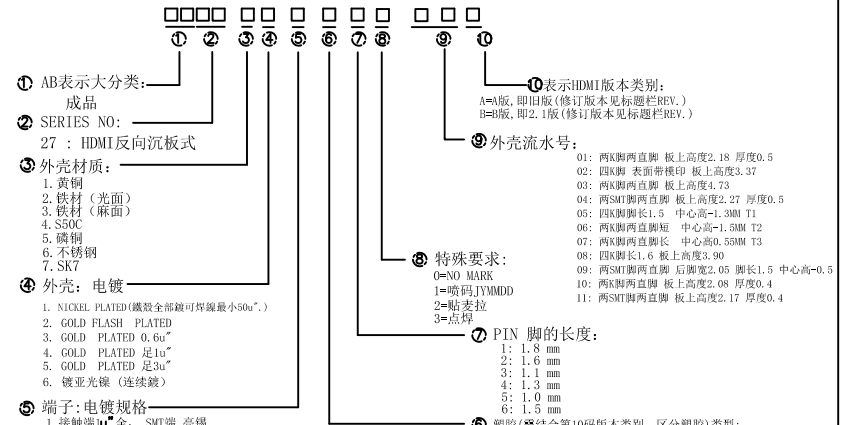

C	SHELL	1	C2680R-H Ni T=0.4MM, 50u"MIN. NICEL ALL OVER
B	TERMINAL	19	C2680R-H SEE PART NO.
A	HOUSING	1	LCP E130i UL94V-0 BLACK
NO	PART NAME	QTY	MATERIAL PLATING & COLOR
GENERAL DIMENSIONAL TOLERANCE			
. X = ±0.35 . ° = ±2.0°			
. XX = ±0.25 . X° = ±1.5°			
. XXX = ±0.15 . XX° = ±1.0°		D.R. PACK 2021.3.5	
PROJECTION		CH.K JHON 2021.3.5	
UNIT		APV.D JHON 2021.3.5	
mm		NAME: HDMI反向沉板A款铜壳镀镍 壳子0.4厚 两K脚两直短脚 四正反弹片 壳底面有耳 针长1.8 端子半金亮锡1u"	
SIZE A4		PART NO. AB 27111A1010A	
SCALE 1:1		FILE NO.	
		SHEET 1 OF 1	
		REV. A2	

CUSTOMER

版本	日期	说明	ECN NO.	NAME
A	2017.8.8	新版发行	SXJ-0016	JOHN
A1	2019.8.28	5000一箱改3000一箱	SXJ-0016	JOHN

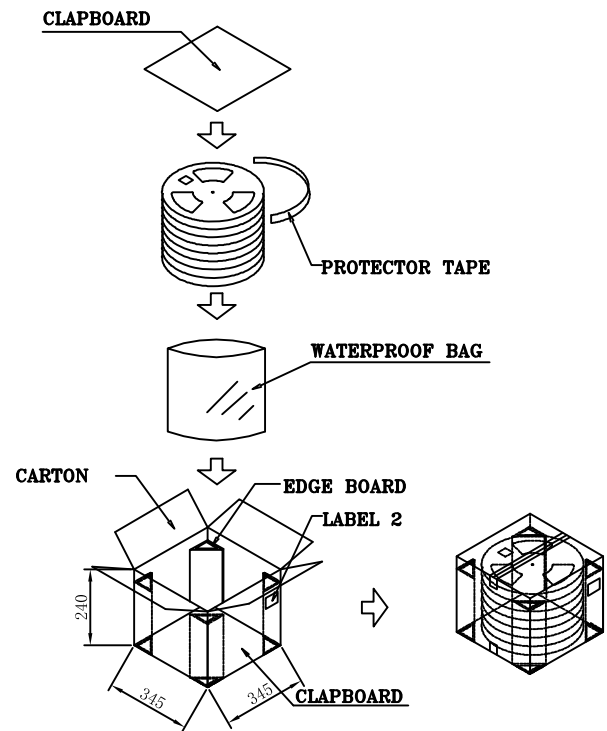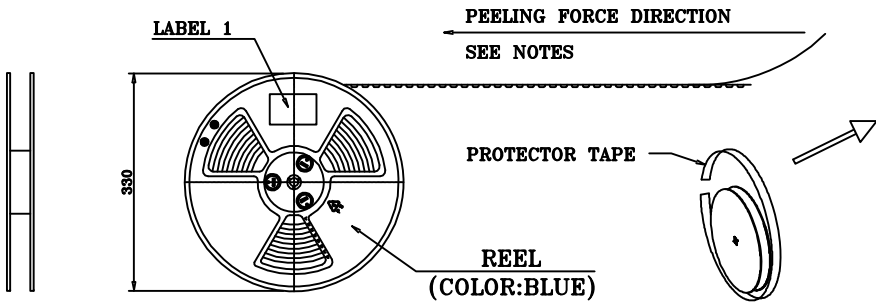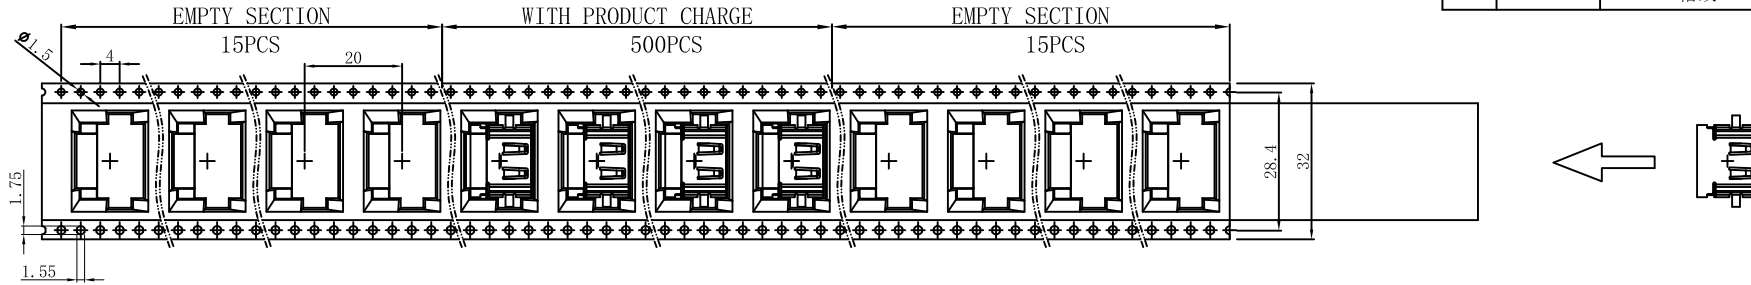

NOTES:

1. DIMENSION:

CARTON: 345 X 345 X 240 mm, K=K. (1PCS)

EDGE BOARD: 400X310mm (4PCS)

CLAPBOARD: 330X330mm (2PCS)

2. QUANTITY:

500 PCS/REEL

6 REELS/SHIPPING CARTON

3000 PCS/SHIPPING CARTON

∇ : Critical Dim	CONSHARE		PART NO.:	
⊙ : Major CAV			AB27111A1010A	
一般尺度公差 ±0.10 mm	DRAWN BY	JOHN	DRAWING NO.	SXJ-0016A001
一般角度公差 ±2°	CHECKED BY	JOHN	DRAWING SIZE	NA A4
⊕	APPROVED BY	JOHN	UNIT	mm
	SORTING NO.		PAGE	1